




SECTION A-A (1:1)

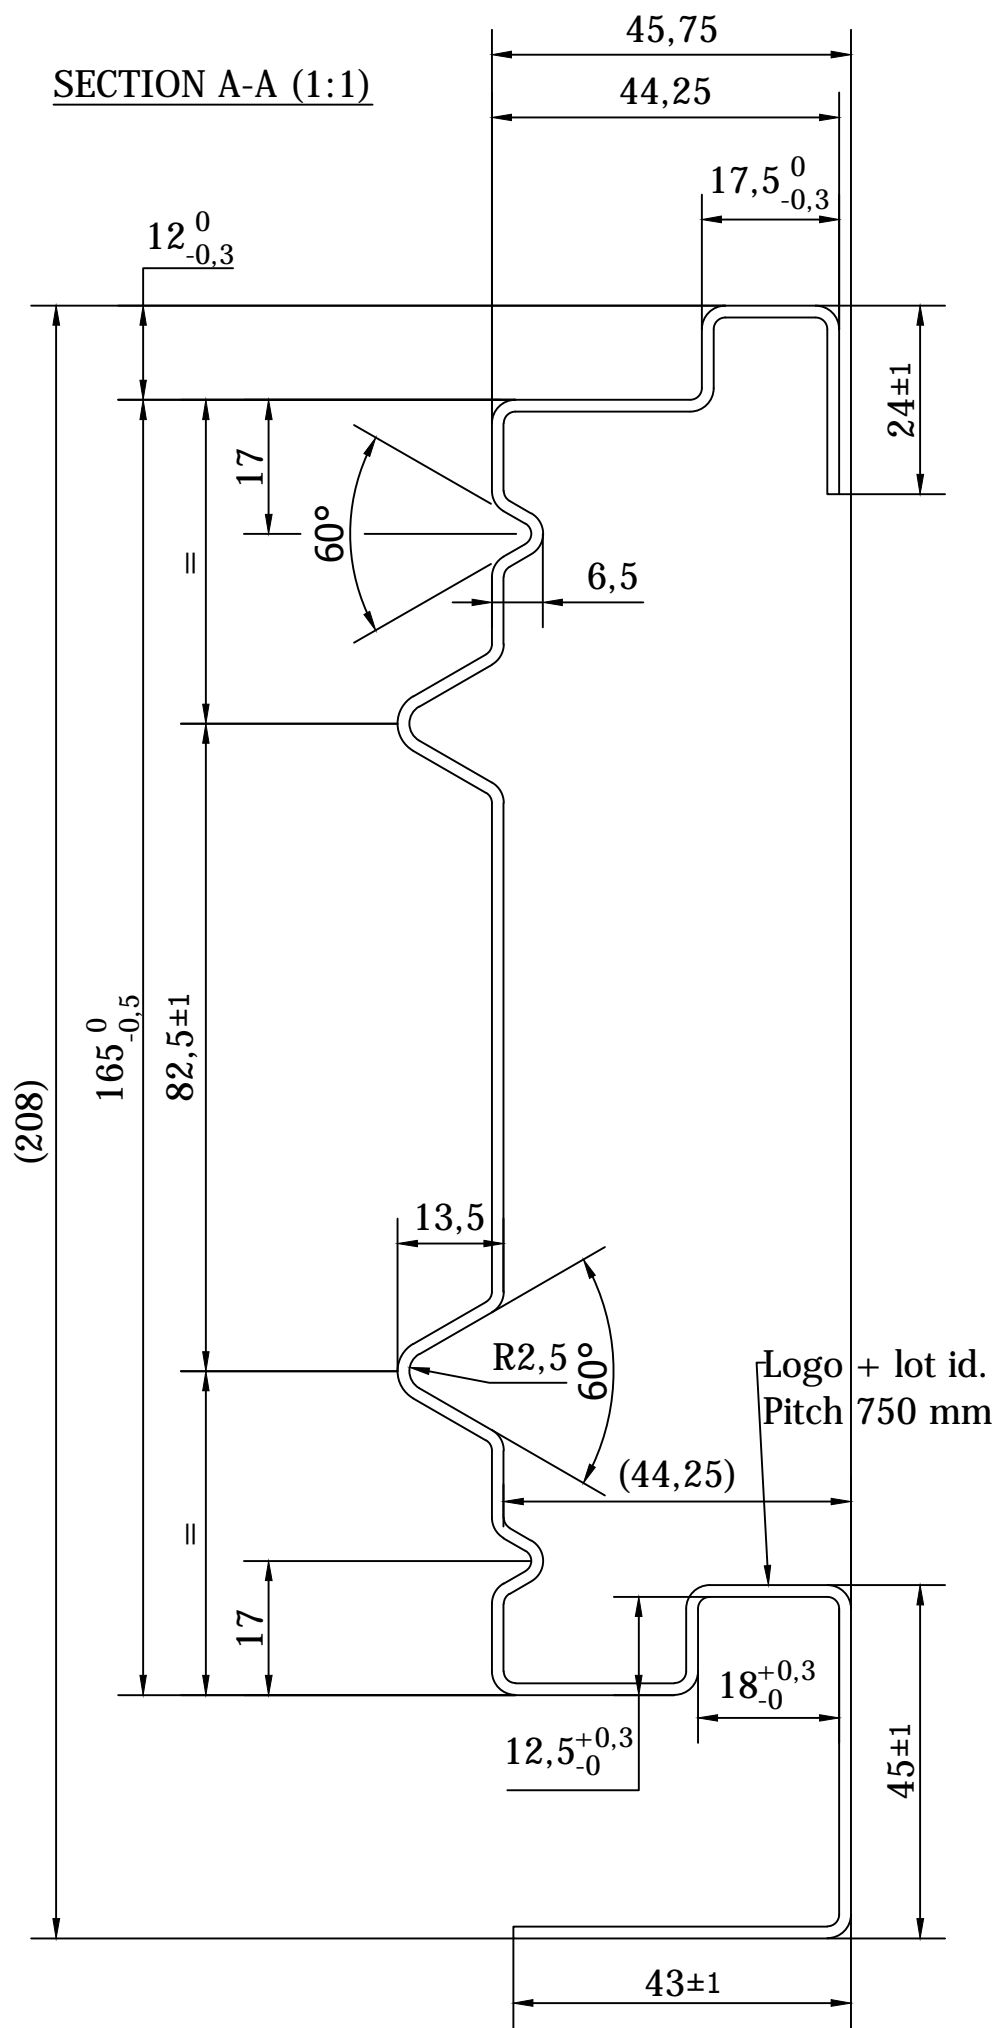

Logo detail:

INTERNAL BENDING RADIUS: 1,5 MM
 GENERAL TOLARANCES AS IN EN 10162
 STRAIGHTNESS: 0,002xL
 TWIST: 1° PER M

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
-	-	-	-	-

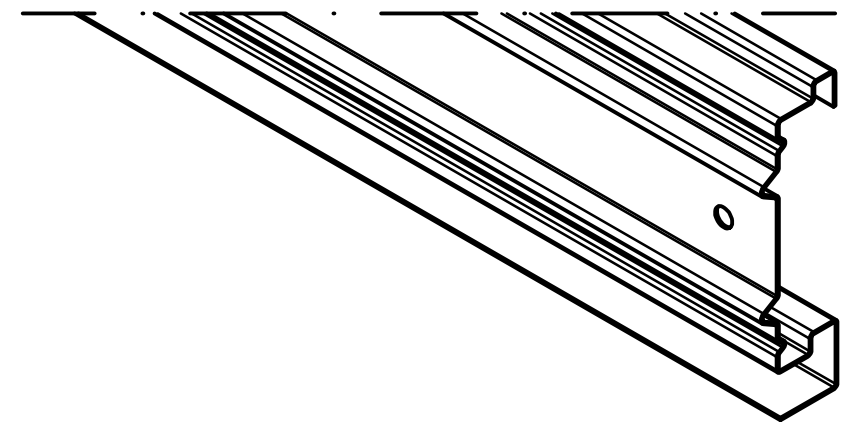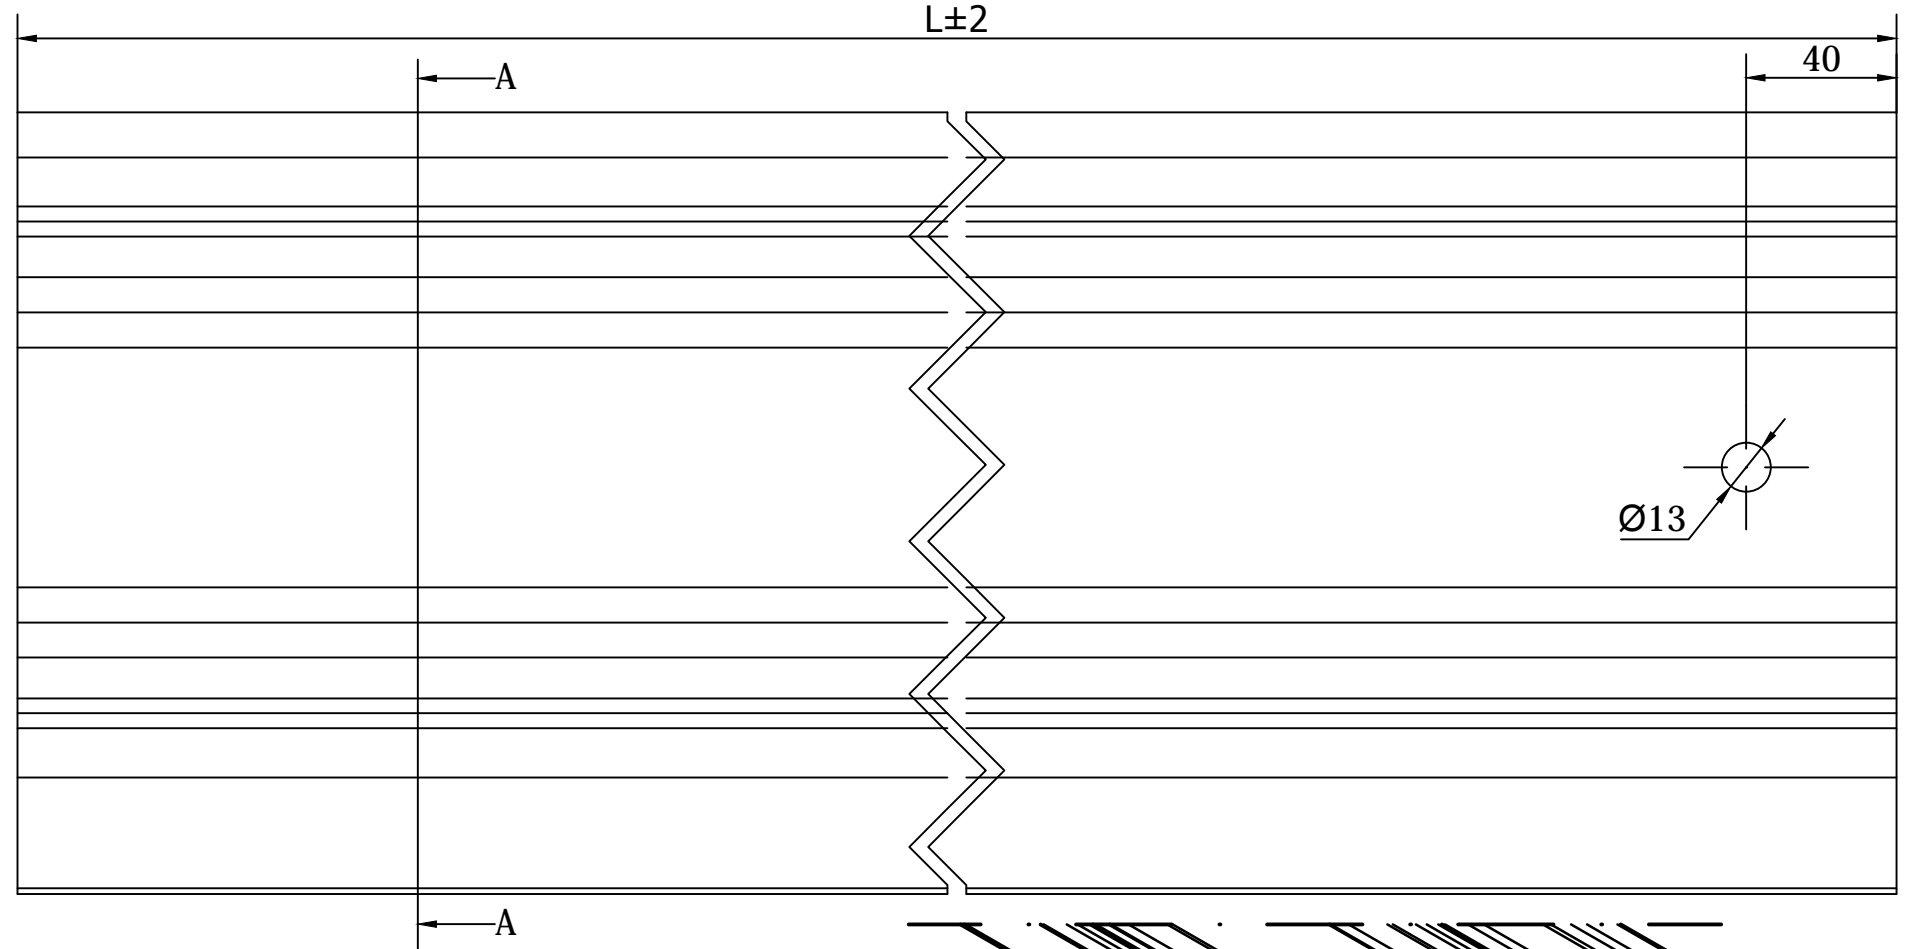

YOUR LOGO MM / YYYY

Steel strip specifications						
Material	Thickness	Strip width	Weight			
Stainless steel EN10088 1.4301 fin. 2B with 350 N/mm2 < Re0.2% > 300 N/mm2	1,5 ± 0,09 mm	** mm	** kg/m			
Zinc Magnesium coated steel EN10346 S280GD+ZM300M	1,5 ± 0,11 mm	** mm	** kg/m			
Progettato da sv	Controllato da ms	Approvato da -	Data creazione - 14/05/2014	Scala 1:2	<small>Le caratteristiche tecniche possono essere oggetto di modifica senza nostro preavviso. Ogni forma di riproduzione del disegno è vietata a termine di legge. Proprietà riservata SIKA S.r.l.</small>	
SIKA COLD ROLLED PROFILES <small>VIA DELLA PACE, 9 - 31030 CASIER (TV) - ITALY - www.sikaprofil.it TEL. +390422381211 - FAX +390422381462 - EMAIL info@sikaprofil.it</small>			Profile for garage		Edizione 0	Foglio 1 / 1
			PSK601			